



Descrizione


Le guarnizioni metalliche piane solide vengono utilizzate in applicazioni dove, a causa delle elevate temperature e pressioni non sono applicabili guarnizioni in materiale morbido.

Le guarnizioni metalliche si dimostrano affidabili sia a basse temperature (fino a -200°C) sia ad alte temperature (oltre 600°C), oltre che a pressioni molto elavate.

Applicazioni

Vengono utilizzate principalmente a temperature e pressioni molto elevate per raccordi oleodinamici, pneumatici, motori, bulloneria, viteria, flange, gruppi elettrogeni e cogeneratori.

Tipologie

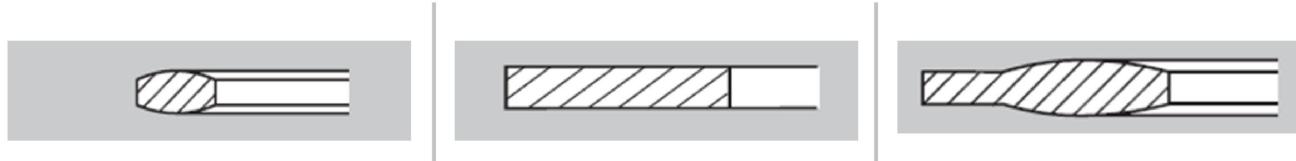



Product description:

Solid flat metal seals are used in applications where, due to high temperatures and pressures, soft material seals are not applicable. Metal seals prove reliable at both low temperatures (down to -200°C) and high temperatures (over 600°C), as well as at very high pressures.

Application:

They are mainly used at very high temperatures and pressures for hydraulic and pneumatic fittings, motors, nuts and bolts, flanges, generator sets and cogenerators.

Notice:

The operating temperature and pressure limits do not apply simultaneously; they depend on various factors and can only be indicated for guidance.

Typologies:

